

Process Technology / Automation | Technology Offer (page 1 of 2)

Innovative nozzle design with homogeneous flow profile usable as divergent long-range nozzle with high penetration depth

Market and Technological Context

Convergent nozzles are used in industry in a multitude of applications, for example as long-range nozzles for the drying of parts placed at large distances (car body painting, glass fabrication) as well as in the field of air-conditioning. The technical challenge of the long-range nozzle is to dry a distant object effectively, precisely and above all uniformly.

Convergent nozzles achieve the long range by accelerating the fluid to a high speed but require high pumping power. Using a conventional divergent nozzle it is possible to widen the area covered by the flow, however, it is not possible to improve the reach of the jet. This is due to the fact that the divergence induces a separation of the flow from the diffuser which leads to inhomogeneous flow and temperature distribution at the distant part.

This problem is overcome in the present invention by a central body which influences the flow profile already in the diffuser (Fig. 1). Thus it becomes possible to achieve equal range combined with a broader coverage at lower pumping power when compared with conventional convergent long-range nozzles.

More details about the **innovation advantage** on page 2.

Patent Situation

Patent applications filed in Germany and Europe.

Advantages of the Novel Nozzle Design

When drying distant goods, the novel design with the central body offers the following advantages over the currently available solutions:

- **Homogeneous flow profile in the far field**
- **Homogeneous temperature profile in the far field**
- **No flow separation from the nozzle cone**
- **Increased penetration range**
- **Reduced pressure loss of fluid**
- **Uniform drying of target**
- **Elimination of thermal stresses**
- **Reduced pumping power**
- **Reduced drying time**

The numerical method which is used for the optimization of the geometry can be used to tailor the design to any requirements. It allows:

- **The numerical optimization of the geometry, including the central body to achieve an optimal flow profile**

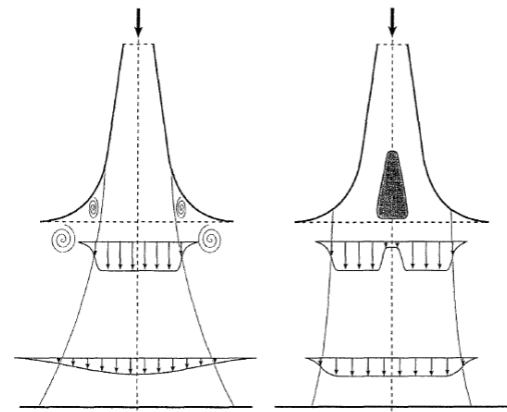


Fig.1: Illustration of the effect of a central body in the nozzle outlet (right) compared with a conventional nozzle.

Process Technology / Automation | Technology Offer (page 2 of 2)

Innovative nozzle design with homogeneous flow profile usable as divergent long-range nozzle with high penetration depth

Innovation

A novel divergent nozzle design was developed at the Institute for Aerospace Thermodynamics at the University of Stuttgart which provides for a homogeneous flow profile even at long distances from the nozzle exit. The flow profile is optimized by a central body shaped and placed in the flow channel in such a manner as to achieve a uniform flow and temperature distribution at the target object. In this way, the flow behavior is significantly improved in the far field. Based on these characteristics, the invention is particularly suited to be used as a long range nozzle for large penetration distances in drying and ventilation applications.

It is possible to determine optimal design geometries for the nozzle and the central body to suit different applications through numerical optimization. A methodology (see Fig. 2) for a numerical design process was developed that allows the flow and temperature profiles to be adjusted optimally to the specific requirements.

Industrial Sector

Industries:

- Automotive
- Process engineering
- Heating, Ventilation and Air conditioning (HVAC)

Application:

- Drying
- Tempering
- Cooling
- Ventilation
- Heating

The Numerical Design Process

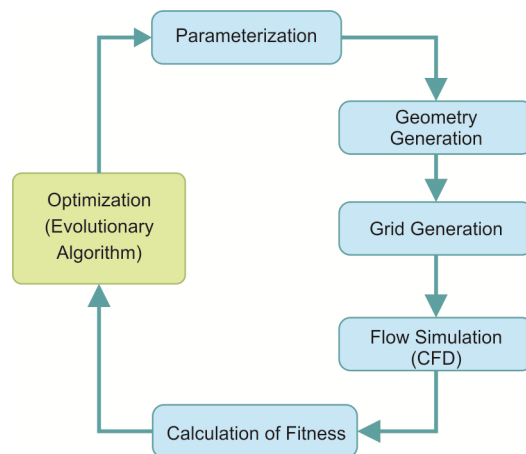


Fig. 2: Numerical process chain for the optimisation of the flow and temperature profiles at long range.

Technology Transfer

TLB GmbH – Agency for Patents and their Commercialisation. As a partner to the scientific research community and industry we offer since over a decade customized services in innovation and patent management. We seek and find global buyers and licensees for market driven inventions. Our goal is to create value from ideas.

For Further Information:

Dr. Frank Schlotter

Email: fschlotter@tlb.de

Tel.: +49 721 79004-0, Fax: +49 721 79004-79

Technologie-Lizenz-Büro (TLB)

der Baden-Württembergischen Hochschulen GmbH

Ettlinger Straße 25, D-76137 Karlsruhe, Germany

www.tlb.de

Reference Number: 12/022TLB