

Fire safety | Structural engineering | Technology Offer

Minimally invasive on-site rapid test of intumescent coatings for enhanced structural fire protection

Field of application

If an architecture is realized using visible steel elements, this may be visually appealing or particularly functional (e.g. in ceiling constructions and supporting structures), however sufficient fire resistance must be ensured in the event of a fire. Open surfaces heat up and collapse much faster than, for example, constructions surrounded by concrete.

In order to increase fire resistance duration, intumescent coatings are used which, in the event of heating up, create an insulating layer through foam formation between the burnt gas and the material surface.

The foaming behavior of such coatings and thus their fire safety function may degrade over time due to climate and chemical weathering. Therefore, reliable testing is important to guarantee the required fire safety properties or to improve them as required.

State of the art

The behavior of intumescent coatings has so far been determined by examining test specimens in a laboratory. This means that a subsequent inspection can only be carried out by taking a sample from the existing structure, which naturally causes damage to the structure and is therefore difficult to implement in practice.

Innovation

A simple and reliable solution is now offered by a test system developed at the Karlsruhe Institute of Technology (KIT). It can be used directly on site and does not damage the supporting structure. A handy test chamber is placed directly on the spot of the supporting structure to be tested and then a corresponding test is carried out. Predefined conditions can be set for the chamber. Subsequently, only the tested spot has to be recoated.

This way, future tests required under building law can be carried out inexpensively and based on reliable data, which helps to avoid expensive and possibly premature preventive renovations.

The recurring fire safety test can now be carried out directly on site in a minimally invasive manner. Uncomplicated and reliable testing in existing buildings is now possible.

Patent portfolio

DE and EP patent applications are pending.

Your benefits at a glance

- ✓ Test carried out directly at the building / on site
- ✓ Flexible hand-held device designed for mobile use
- ✓ Minimally invasive (a surface of approx. Ø 40 mm must be recoated)
- ✓ No structural damage to the building

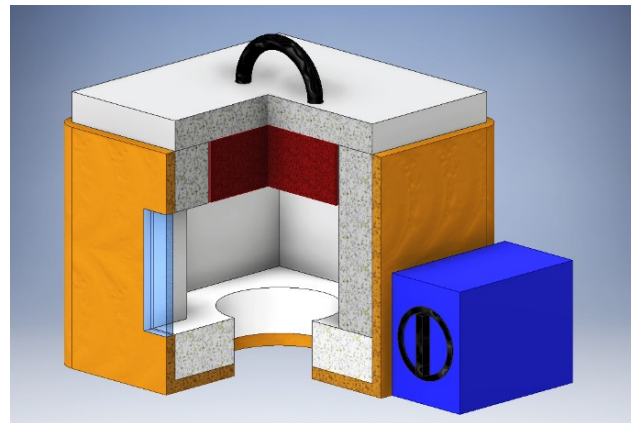


Figure: CAD model of the first prototype design of the hand-held device for on-site testing of intumescent coatings [Picture: KIT].

Technology transfer

TLB GmbH manages inventions until they are marketable and offers companies opportunities for license and collaboration agreements.

Contact

Anne Böse, Business Development
boese@tlb.de
 Technologie-Lizenz-Büro (TLB)
 der Baden-Württembergischen Hochschulen GmbH
 Ettlinger Straße 25, D-76137 Karlsruhe (Germany)
 T +49 721 79004 0, F +49 721 79004 79
www.tlb.de

Reference number: 18/037TLB